

H-80 Series High Flow Humidifier

Provide more better oxygen therapy with High Flow



CRITECHCARE MEDICAL SUPPLY AND SERVICES
DOOR 2, RGF BUILDING, LEO ST., PHASE 2, DONA LUISA, DAVAO CITY

Email Address: critechcaremedical@gmail.com
Website: critechcare.com

Contact No: (082) 333-5570
Phone No: 0916 293 7893

H-80 Series

H-80 Series high-flow oxygen therapy, highly integrated design, to meet more needs of clinical treatment


- provide a maximum of 80L / min air-oxygen mixed gas, oxygen concentration can be set automatically, providing an exclusive patent AutoFlow function, SmartFlow function.
- Disinfection-free design, Water chamber has a backflow prevention valve to prevent gas backflow, and overall maintenance is more convenient.

Can set target oxygen concentration, temperature and flow


- Control target oxygen concentration automatically, oxygen delivery in the machine, 21% -100%, accurate to 1%;
Wall oxygen source, oxygen cylinder, oxygen generator can support it;
The built-in ultrasonic oxygen sensor requires no maintenance.
- 9-stage humidification temperature: 29 °C -37 °C, accurate to 1 °C.
- Advanced dual fan design, two levels of HFlow and LFlow, 2 L / min ~ 80 L / min, can meet patients of most ages.
- Innovative 7-level humidity compensation function, providing ± 3 adjustable humidity compensation, easily coping with various harsh temperature and humidity environments

Innovative High Flow model

- AutoFlow™
Automatically set the output flow parameters based on the peak expiratory flow(PEF) of the patient, simplifying the setting steps, satisfying the treatment effect and improving patient comfort

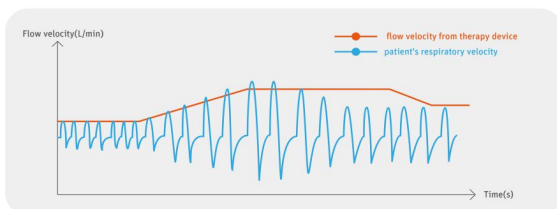

- SmartFlow®
Follow the patient's every breath, switch the flow between breaths, provide a higher flow when inhaling, and a lower flow when exhaling, follow your every breath like a bi-level ventilator, comfortable and more economical oxygen resources.

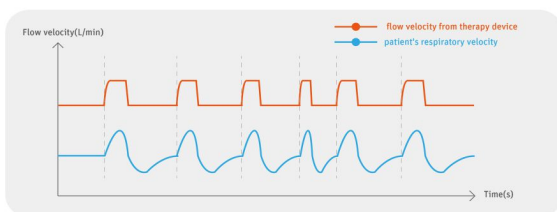

Hot standby function designed for convenient use and saving oxygen

- H-80 Series has a hot standby function, which allows you to continue warm oxygen therapy at any time without turning off the machine for a short time to leave, saving oxygen without having to wait for warm-up time.

More comprehensive monitoring indexes

- Real-time monitoring of Oxygen Concentration, Flow, Temperature, Respiratory Rate, sPEEP.



Simple installation and easy setup

- Integration, disinfection-free design, saving clinical use and maintenance time.

* Trolley is optional

H-80 Series High Flow Oxygen Therapy, can be used for patients with spontaneous breathing, including artificial airway respiratory insufficiency, and can be used for patients in hospitals and long-term care institutions.

- In high flow mode, flow rate is 2 L / min ~ 80 L / min, which can set the concentration of inhaled oxygen automatically.

Accessories for option

Water Chamber



Water Chamber Adapter



One-off Heated
breathing tubing
model:LH2



Nasal cannula
model:NC10XS、NC10S、
NC10M、NC10L、



Medical
Trolley



Recommended flow and range for high flow oxygen therapy

The following table lists the recommended starting flows and flow ranges for clinical studies on high flow oxygen therapy

[illegible]

H-80 Series

	H-80AS	H-80A	H-80M
Adjustment Method of Oxygen Concentration	Auto	Auto	Manual
Flow Monitoring	Monitorable, Adjustable	Monitorable, Adjustable	Monitorable, Adjustable
Flow Rate	2L ~ 80L/min	2L ~ 80L/min	2L ~ 80L/min
Oxygen Concentration Adjustment Range	21% ~ 100%	21% ~ 100%	21% ~ 100%
★Temperature Output Range	29°C ~ 37°C	29°C ~ 37°C	29°C ~ 37°C
★Temperature Adjustment Gear	9 steps adjustable	9 steps adjustable	9 steps adjustable
Whether the host is disinfection-free	Yes	Yes	Yes
Screen Size	3.5 inches	3.5 inches	3.5 inches
Trend Review Function	1 day; 3 days; 7 days	1 day; 3 days; 7 days	1 day; 3 days; 7 days
Oxygen Concentration Monitoring	Monitorable, Adjustable	Monitorable, Adjustable	Monitorable
Temperature Monitoring	Monitorable, Adjustable	Monitorable, Adjustable	Monitorable, Adjustable
★sPEEP Monitoring	Monitorable	Monitorable	Monitorable
★Respiratory Rate Monitoring	Monitorable	Monitorable	Monitorable
Automatic filter replacement function	Yes, can be set	Yes, can be set	Yes, can be set
Automatic water refill tips	Yes	Yes	Yes
★AutoFlow	Yes	/	/
★SmartFlow	Yes	/	/
Humidity Compensation	-3~+3, 7 steps adjustable	-3~+3, 7 steps adjustable	-3~+3, 7 steps adjustable
★sPEEP	0~4 steps adjustable	/	/
★Hot Standby	Yes	Yes	Yes

CRITECHCARE MEDICAL SUPPLY AND SERVICES
DOOR 2, RGF BUILDING, LEO ST., PHASE 2, DONA LUISA, DAVAO CITY

Email Address: critechcaremedical@gmail.com
Website: critechcare.com

Contact No: (082) 333-5570
Phone No: 0916 293 7893

